
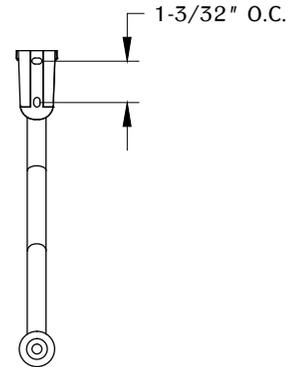



NOTE:

- Weight capacity is 45 lbs. installed into stud.
- Weight capacity is 24 lbs. installed into drywall.
- Maximum bracket spacing is 36"
- Shelf projection is 12" MAX.

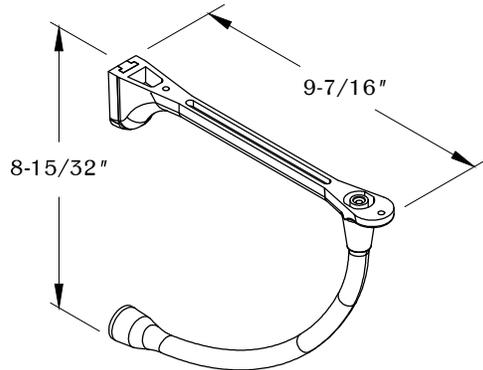


REAR VIEW

1

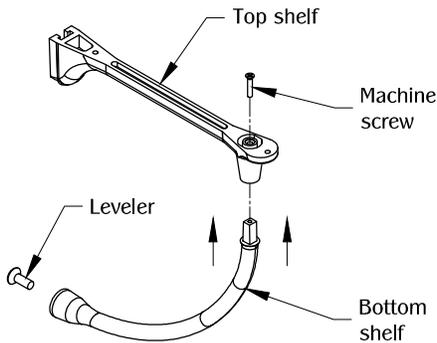


Assemble SH11 before installation by inserting the bottom shelf into the top shelf and securing with provided machine screw.

2

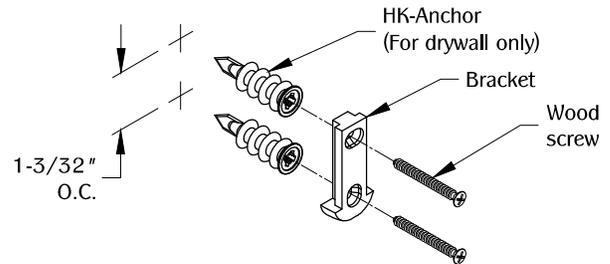


Install SH11 bracket, Make sure the its leveled and aligned straight. Then install the part with the mounting hardware provided. Repeat procedure for the second shelf support.

3

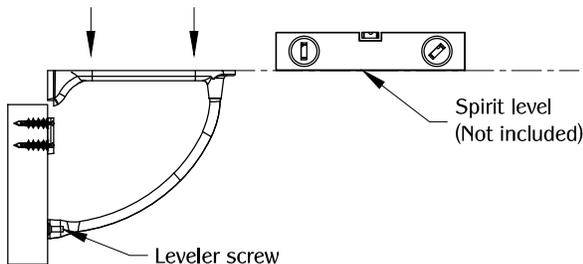


Slide down shelf support into the bracket and adjust the leveler until your shelf its leveled. (We recommend to use a spirit level not included)

4

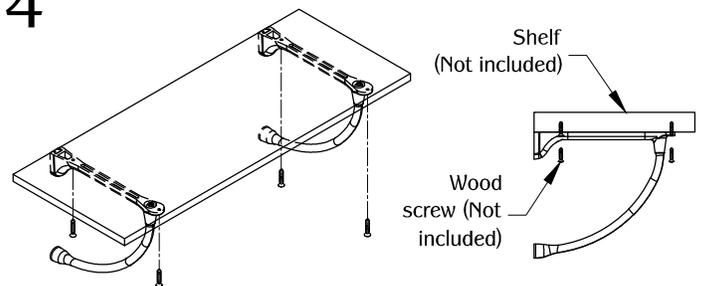

Secure shelf with (2) #8 countersink wood screws.

TABLE OF CONTENTS:

 1X SH11 Top shelf	 1X SH11 Bottom shelf	 1X Leveler screw	 2X HK-Anchor
		 1X Mounting bracket	 1X Machine screw	 2X 1-1/2" Wood screw