



PART #

PCS77

310.318.2491 • 800.523.1269 • www.mockett.com

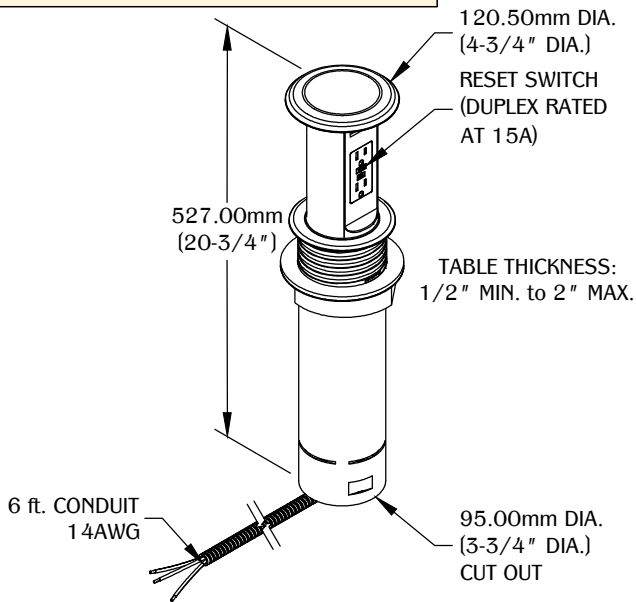


1



Note:  
 Minimum clearance required under the work surface is 16".


Make a cutout in the desired location on your work surface. Allow enough clearance for unit operation. DO NOT place unit where the cable is strained or trapped.

2

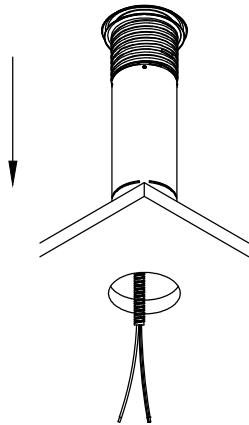

Guide the conduit cord through the cut out. Install the unit into the cutout and make sure it is fully level on the surface.

3

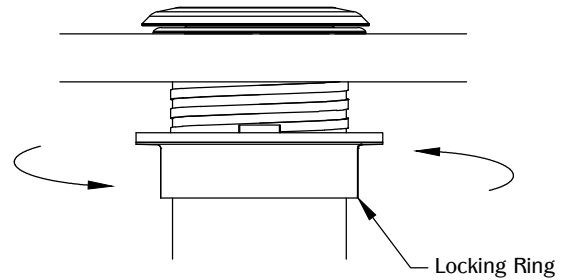

Screw threaded lock ring onto mounting collar by turning clockwise. Locking ring should rotate smoothly once properly engaged. If not, the locking ring may be cross-threaded - undo and try again.

4

Connect the wire whip to a junction box. It is recommended that the unit be installed by a professional electrician.


**MAINTENANCE AND CARE:**

1. \*\*Ensure circuit breaker to unit is shut off prior to cleaning.
2. Clean the unit with a damp cloth and dry immediately.
3. Do not use harsh chemical solvents.



- For indoor use only.
- If any malfunction occurs, do not attempt to repair.
- Do not insert foreign objects into power outlets.
- For counter top mounting.
- Risk of electric shock. (Do not connect to another relocatable power tap.)

**TABLE OF CONTENTS:**



.....1 X PCS77



.....1 X Locking Ring