


## DP312



PROPRIETARY AND CONFIDENTIAL.  
ALL DIMENSIONS HAVE A +/- 1/16" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

### SPECIFICATIONS


- Glass thickness is 6.00mm (1/4") MIN. to 10.00mm (13/32") MAX.

### TABLE OF CONTENTS

	..... 2X DP312
	..... 2X Plastic Washer
	..... 1X M8 X 1 X 40.00mm Thread Set Screw

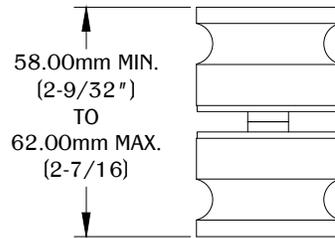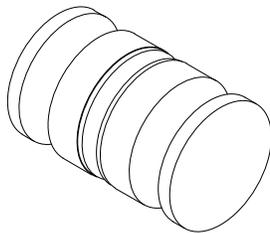


TOP VIEW



35.00mm DIA.  
(1-3/8")

FRONT VIEW


**1**

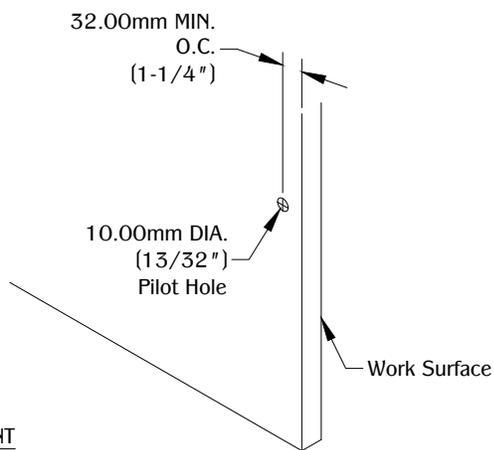

FRONT

Determine the position and location of the part on the work surface. Mark the mounting position 32.00mm (1-1/4") minimum on center from the edge and drill the 10.00mm (13/32") diameter pilot hole.

**2**

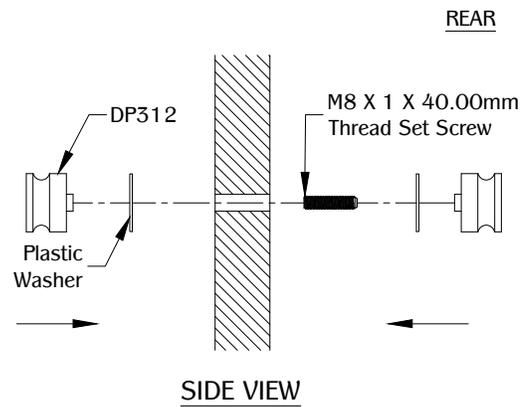

FRONT

SIDE VIEW

Align the (1) M8 X 1 X 40.00mm thread set screw, (2) washers and (2) DP312 to the pilot hole to secure the part to the work surface. Make sure the part is fully level on the work surface.