

PCS140

PROPRIETARY AND CONFIDENTIAL.
ALL DIMENSIONS HAVE A +/- 1/32" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.


⚠ WARNING ⚠

- For indoor use only.
- For use on a normally dry work surface.
- If any malfunction occurs, do not attempt to disassemble or repair.
- Avoid placing the charger in a high temperature environment or near fire.
- Unit must be connected to a compliant wall outlet with ground connection.

SPECIFICATIONS

- 6 ft. cord length. Allow a minimum of 3" (76.20mm) cord slack for unit function.
- USB-A and USB-C ports are for charging use only.
- Recommended cutout is 2-3/8" (60.00mm) X 9-23/32" (247.00mm).
- Recommended table thickness is 25/32" (20.00mm) MIN. to 2-7/32" (56.00mm) MAX.



TABLE OF CONTENTS




..... 1X PCS140




..... 2X Mounting Clips

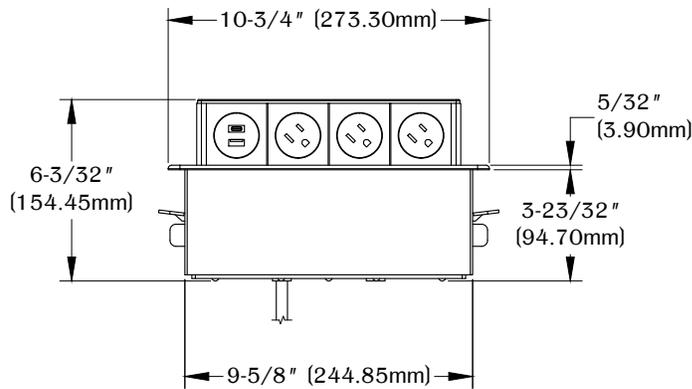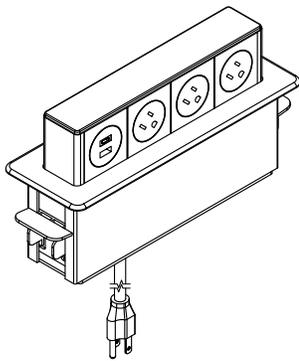


FRONT VIEW

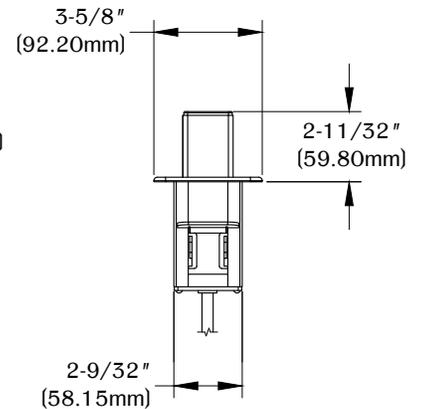

RIGHT VIEW

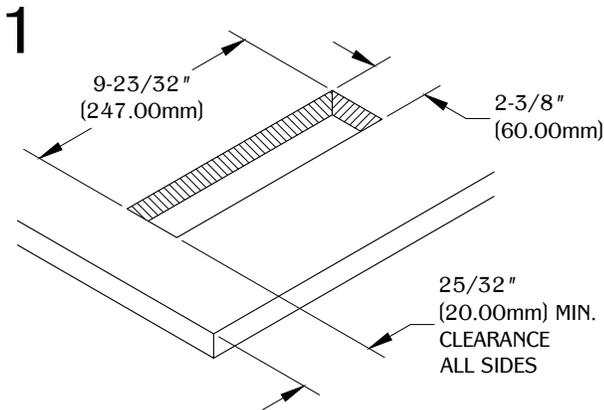

Make a cutout in the desired location on your work surface. Allow 25/32" (20.00mm) MIN. clearance on all sides away from the edge of the work surface for unit operation. DO NOT place unit where cable is strained or trapped.

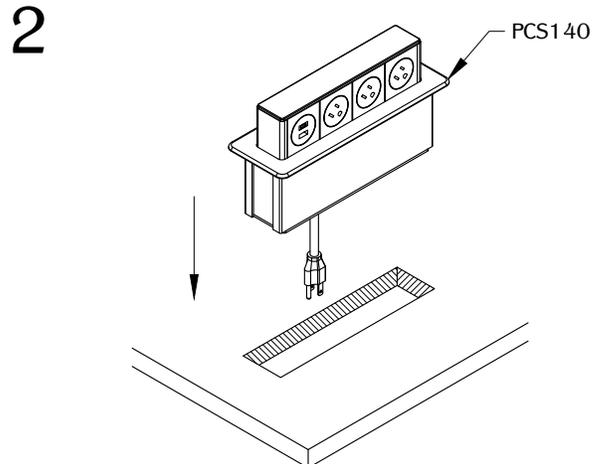


Guide the cord into the cutout. Install the PCS140 into the cutout and make sure it is fully level onto the work surface.

PCS140

PROPRIETARY AND CONFIDENTIAL.


ALL DIMENSIONS HAVE A +/- 1/32" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

3

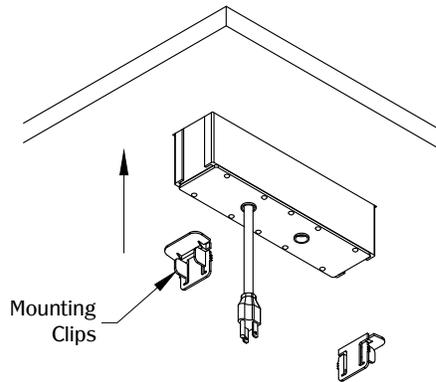

Secure the unit by installing (2) mounting clips on the underside of the PCS140. Plug the unit into a nearby outlet and the unit is ready for use.

4

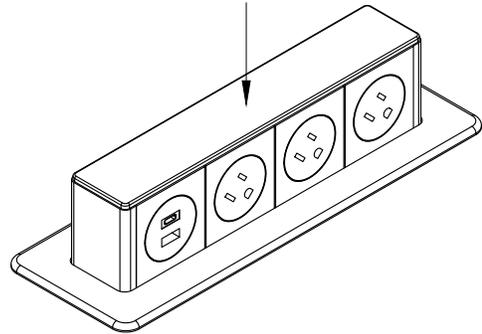

To open the unit, firmly press down on the top-middle cover until it clicks once to unlock. To close the unit, push down on the top-middle cover until it clicks once to lock.