
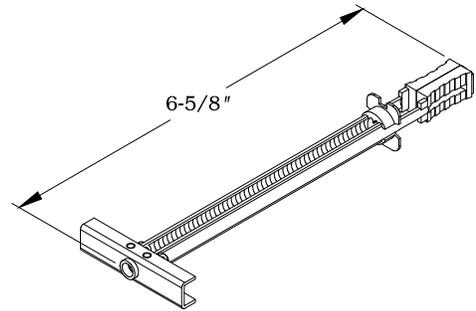


Toggle Bolt Anchors

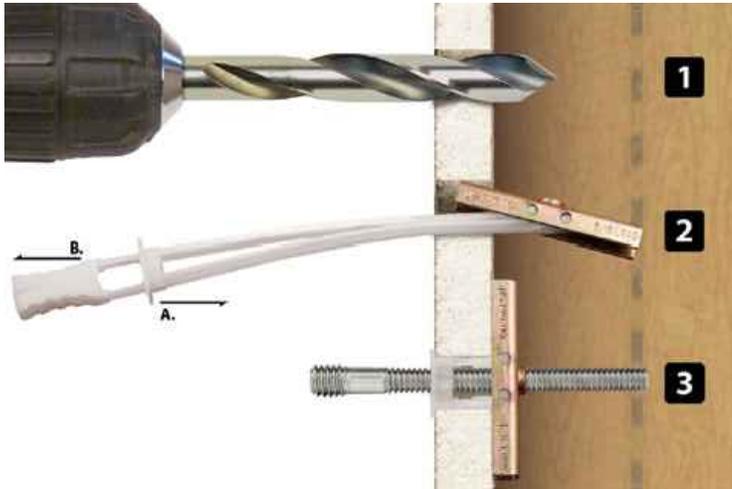

Step 1: Drill a 1/2" hole in to the wall board or hollow mounting surface.

Step 2: Push the metal wing end of the Zip-Toggle through the hole as shown. When the wing flips back into the open position, push the lock ring (A) up as tight as possible against the wall while pulling the tab (B) straight away from the wall. Once the assembly is tight on the wall, pull the loop apart, and bend the zippers to the wall to break them off.

Step 3: Thread the set screw into the anchor. Attach the MPB parts needed for your application.

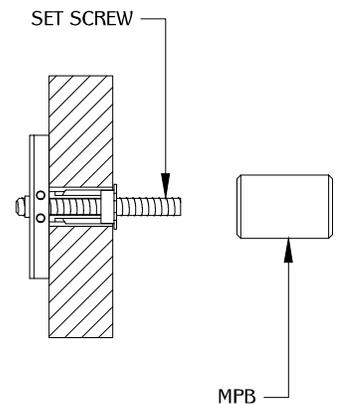
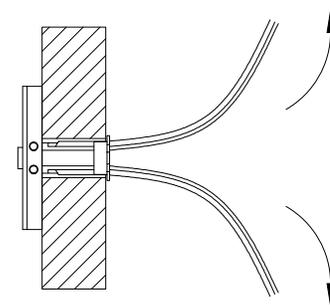
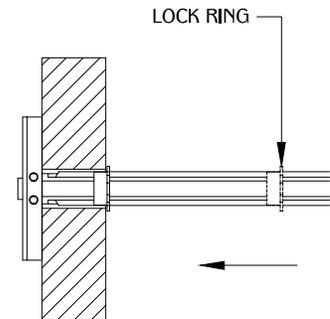



TABLE OF CONTENTS:

1 X 1-1/2" SET SCREW
1 X 1/4" -20 THREAD TOGGLE BOLT ANCHOR