

## PCS142

PROPRIETARY AND CONFIDENTIAL.  
ALL DIMENSIONS HAVE A +/- 1/32" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.



WARNING

- For indoor use only.
- For use on a normally dry work surface.
- If any malfunction occurs, do not attempt to disassemble or repair.
- Avoid placing the charger in a high temperature environment or near fire.
- Allow enough clearance for part operation.
- Do not insert foreign objects into the socket.
- Avoid liquid spills into outlet.

### SPECIFICATIONS

- 6 ft. cord length.
- USB-A and USB-C ports are for charging use only.
- Recommended cutout is 2-1/2" DIA. (63.50mm).
- Recommended table thickness is 25/32" (20.00mm) MIN. to 2-5/32" (55.00mm) MAX.
- Minimum clearance required from the edge of the work surface is 25/32" (20.00mm).
- Minimum clearance required under the work surface is 12" (305.00mm)



### TABLE OF CONTENTS




..... 1X PCS142



..... 1X Lock Ring

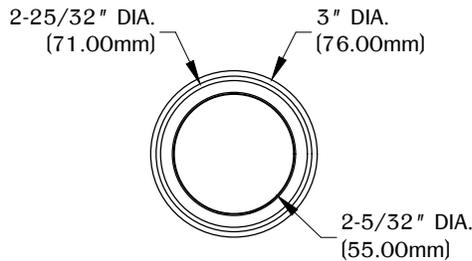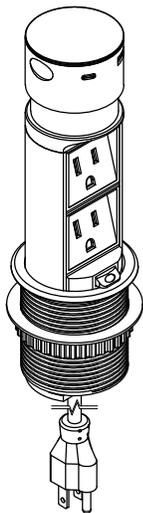


TOP VIEW

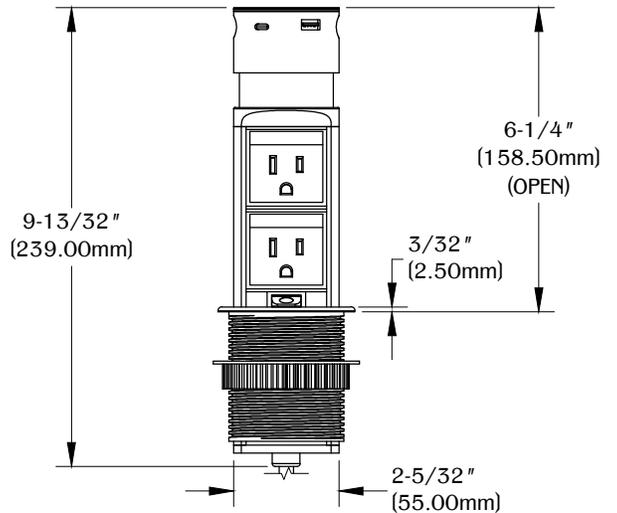


FRONT VIEW (OPEN 2)

1

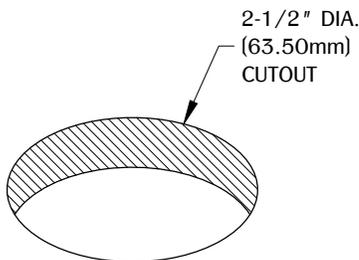

Make a cutout in the desired location on your work surface. Allow enough clearance for unit operation. DO NOT place unit where cable is strained or trapped. (Note: Minimum clearance required from the edge of the work surface is 25/32" (20.00mm) and minimum clearance required under the work surface is 12" (305.00mm).)

2

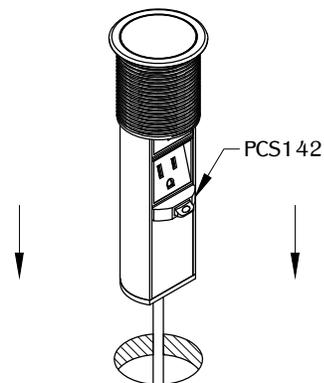


Install the PCS142 into the cutout and make sure it is fully leveled onto the work surface.

## PCS142


PROPRIETARY AND CONFIDENTIAL.  
ALL DIMENSIONS HAVE A +/- 1/32" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

3

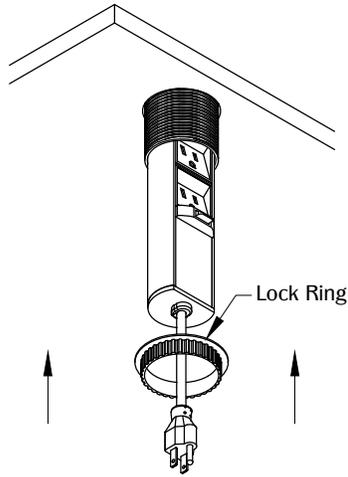


Guide the cable through the lock ring and secure the unit by turning the lock ring clockwise. Plug the power cord into a nearby outlet and the unit is ready for use.

4

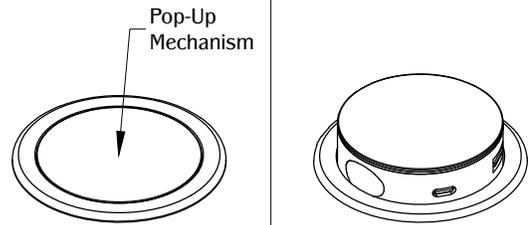

Press down on the pop-up mechanism to expose or hide the USB ports on the unit. (NOTE: Remove cords from USB ports before closing the unit.)

5

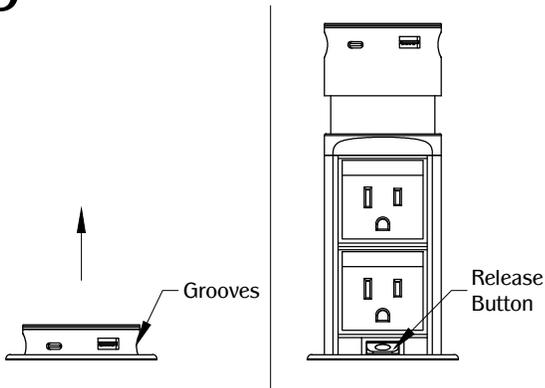

Lift the USB port housing by the side grooves until it locks and the power outlets are visible. Press the release button to lower the unit, then push the housing down until it is fully closed.