
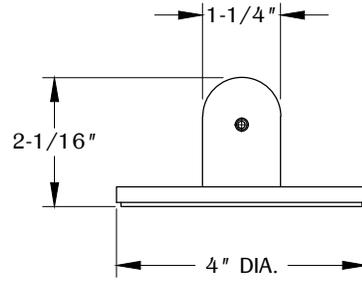



NOTE:

- Panel thickness is 1/4" MAX.
- Maximum panel height is 20".
- Maximum panel width is 60".
- Maximum spacing between panel grips is 48".
- Two PGRP16 brackets needed to hold a panel.




FRONT VIEW

1

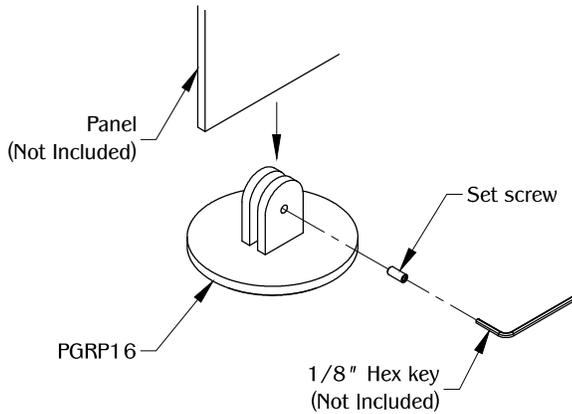


Slide the panel into the open slot on the panel grip and secure by using a 1/8" hex key to tighten the set screw. Repeat steps as needed for additional panel grips. (Note: Nylon tip screw available for glass panel installation. Sold separately.)

2

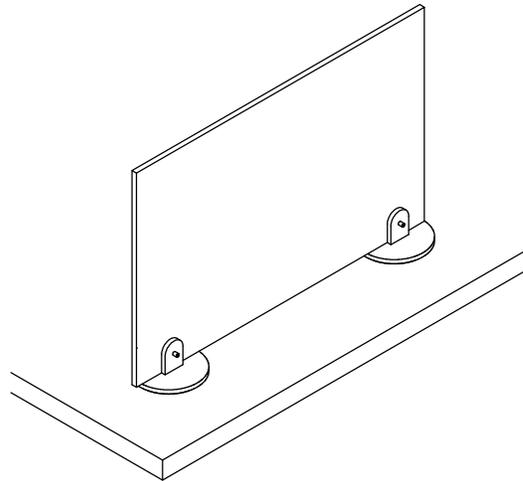

Determine the position and location of the panel assembly on the work surface and set in place.

TABLE OF CONTENTS:



..... 1X PGRP16



..... 1X 1/2"  
1/4" - 20 Thread  
Set Screw



..... 1X 5/16"  
1/4" - 20 Thread  
Nylon Tip Screw  
(OPTIONAL)