


PROPRIETARY AND CONFIDENTIAL. All dimensions have a (+/-) 1/32" tolerance unless otherwise specified. We do not recommend drilling or cutting any holes before receiving a product or a product sample.


### SPECIFICATIONS

- Weight capacity is 300 lbs. per leg.


### TABLE OF CONTENTS




..... 1X TL79

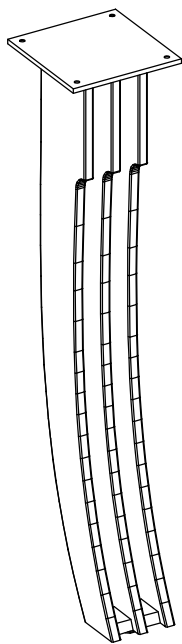

4X  
1/4" DIA.  
COUNTERSUNK  
TO 3/8" DIA.




BOTTOM VIEW

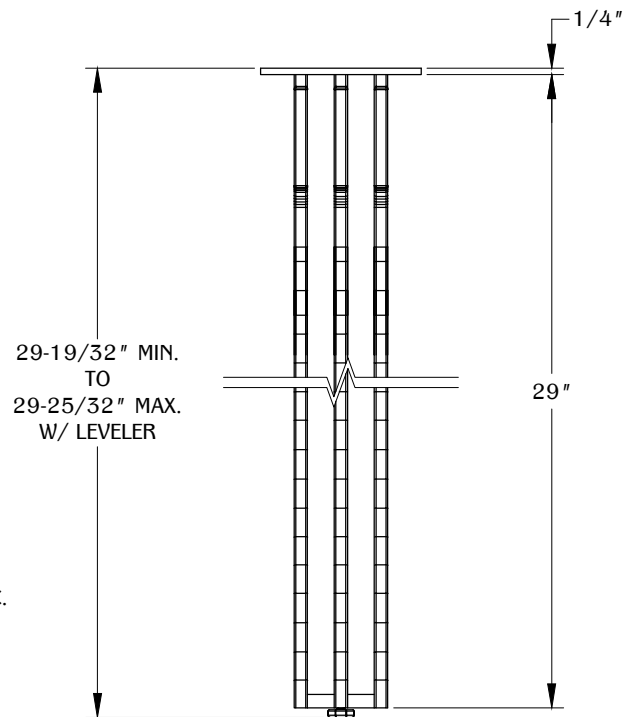


FRONT VIEW

1

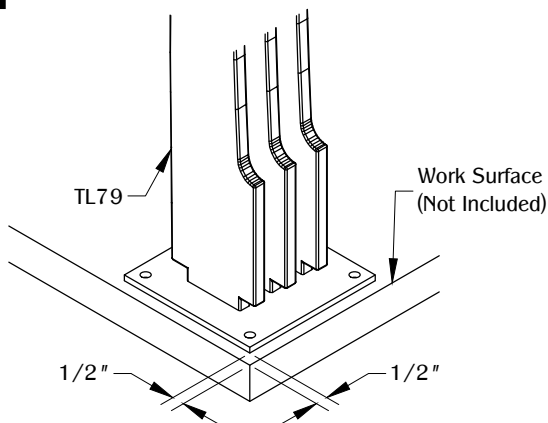

Determine the position and location of the part under the work surface. Allow 1/2" clearance at the edge of the work surface.

2

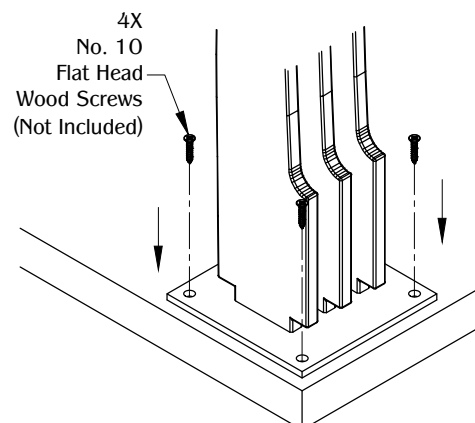

Secure the leg by using (4) No. 10 Flat head wood screws. (Note: Use appropriate screws and screw length depending on the table type and thickness.)