

PROPRIETARY AND CONFIDENTIAL. All dimensions have a (+/-) 1/16" tolerance unless otherwise specified. We do not recommend drilling or cutting any holes before receiving a product or a product sample.




WARNING

- For indoor use only.
- For use on a normally dry work surface.
- Must be plugged into a valid ground connection before use.
- If any malfunction occurs, do not attempt to disassemble or repair.
- Avoid placing the charger in a high temperature environment or near fire.
- Allow enough clearance for part operation.
- Do not insert foreign objects into the socket.
- Avoid liquid spills into outlet.
- Remove all plugs and cords from the outlets and USB ports before closing unit.
- Metal objects, bank cards, digital IC cards should not be placed between the charger and the phone to avoid damage.
- Do not overload unit. (See specifications below.)

### SPECIFICATIONS

- 5 ft. cord length.
- USB-A and USB-C ports are for charging use only.
- Wireless charging output is 10W MAX.
- Recommended cutout is 4" DIA. (101.50mm).
- Recommended table thickness is 1/2" (12.50mm) MIN. to 1-31/32" (50.00mm) MAX.
- Maximum rating 1500W.
- AC voltage 125V.
- AC current 12A.
- Minimum clearance required under the work surface is 15-1/2" (394.00mm).
- Mobile device must be equipped with a wireless charging receiver. (Wireless charging accessories not included.) Check mobile manufacturer for compatibility.



### TABLE OF CONTENTS

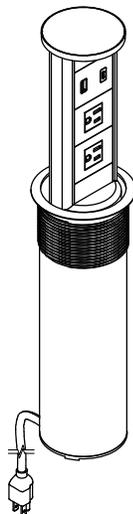


..... 1X PCS145



..... 1X Lock Ring

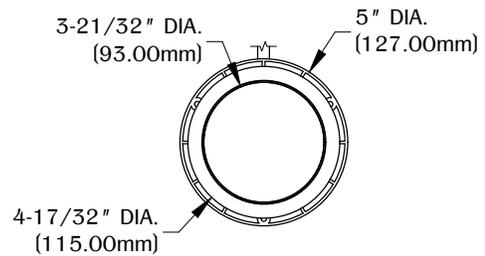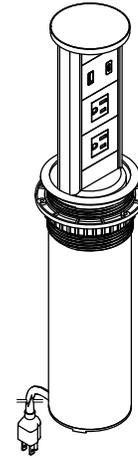


TOP VIEW

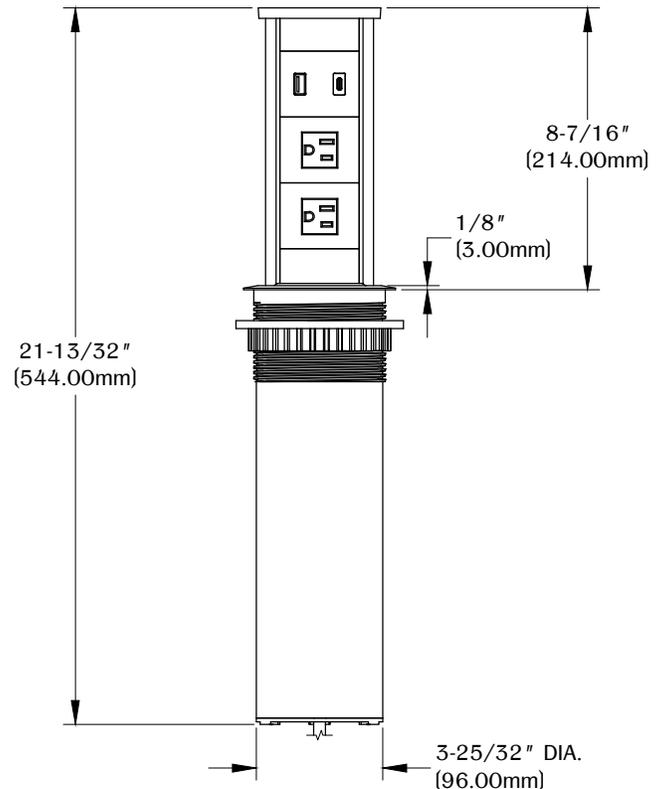

FRONT VIEW


PROPRIETARY AND CONFIDENTIAL. All dimensions have a (+/-) 1/16" tolerance unless otherwise specified. We do not recommend drilling or cutting any holes before receiving a product or a product sample.

1

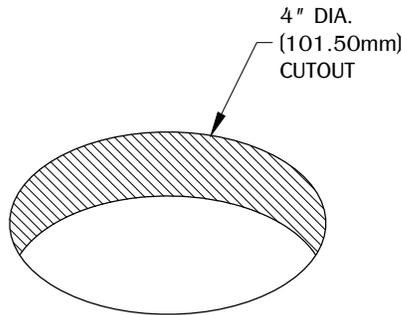


Make a cutout in the desired location on your work surface. Allow enough clearance for unit operation. DO NOT place unit where cable is strained or trapped. (Note: Minimum clearance required under the work surface is 15-1/2" (394.00mm).)

2

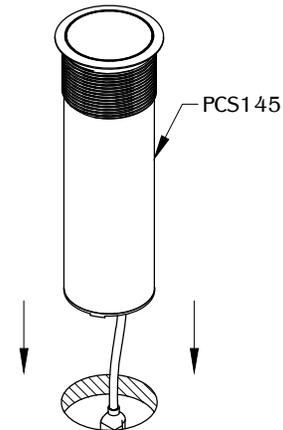


Guide the cord through the cutout. Install the PCS145 into the cutout and make sure it is fully leveled onto the work surface.

3

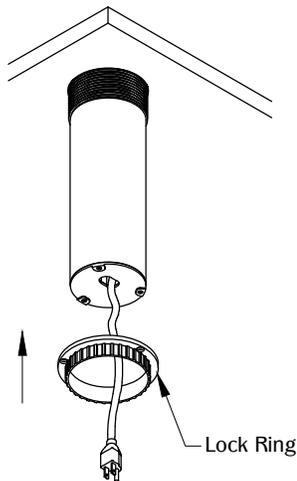


Guide the cord through the lock ring and secure the unit by turning the lock ring clockwise. Plug the power cord into a nearby outlet and the unit is ready for use.

4

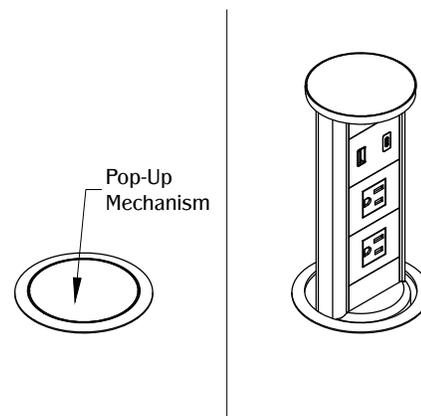


Press down on the pop-up mechanism to expose or hide the USB ports on the unit. (NOTE: Remove cords from USB ports before closing the unit.)

5

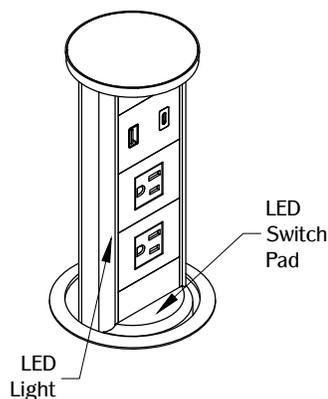

Once the unit is in the open position press the LED switch pad to turn on or turn off LED light. To adjust the light settings, hold the LED switch pad down until desired brightness. (Note: Turn off LED light before closing unit.)

6

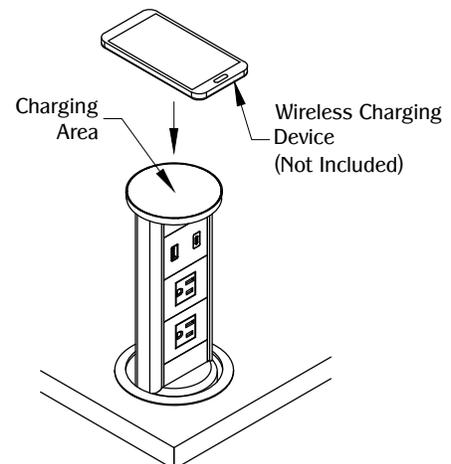

Position mobile device on the center of the charging area. The charging icon will activate on the device screen when properly aligned at the center of the charging area.