



TOP VIEW




NOTE:


1. Conduit not included.
2. Unit is rated at 20A capacity.
3. Recommended table thickness 1/2 [12.50mm] MIN. to 1 5/8 [41.00mm] MAX.
4. Recommended cutout is 1 7/8 DIA. [48.00mm].
5. Minimum clearance required is 8 [203.00mm] under the work surface.

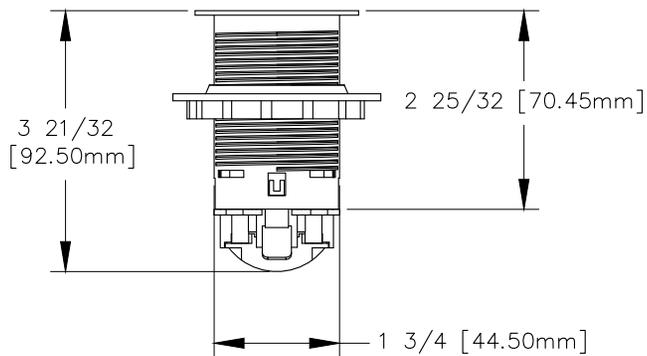

FRONT VIEW

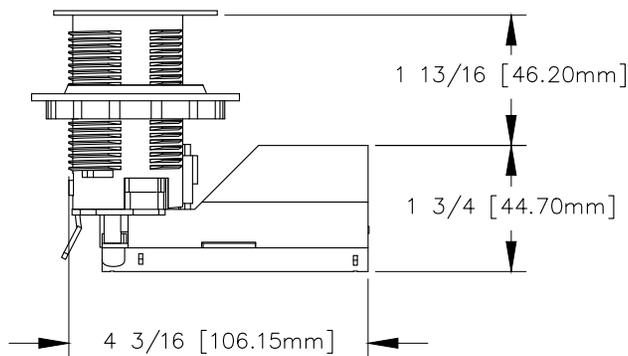

RIGHT VIEW

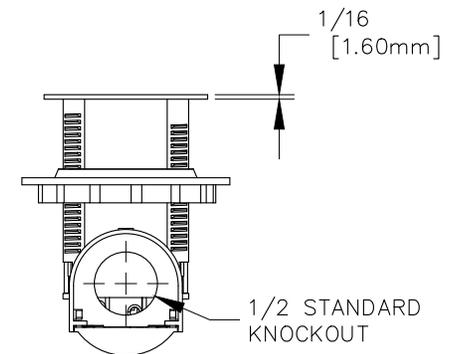

REAR VIEW