


48.00mm DIA.
(1-7/8")




24.00mm
(15/16")

NOTE:


- Prior to any installation please consider, the weight of the door corner and the type of floor.
- Use caution if installing on heated floor.
- Do not install door stop within foot traffic area as this may create a tripping hazard.

1

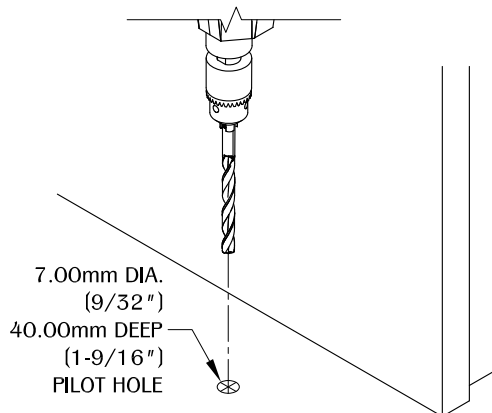


Determine the position and location of the part in the work surface behind the door. Mark the mounting position and drill the pilot hole.

2

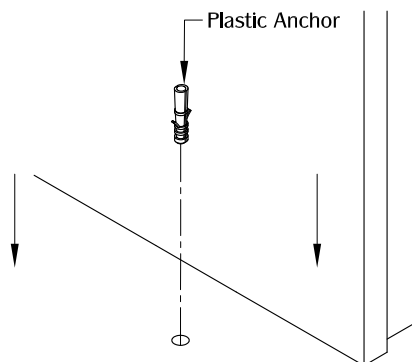


Install the plastic anchor into pre-drilled hole.

3

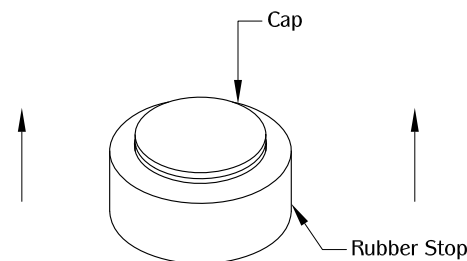


Remove cap from the rubber stop.

4

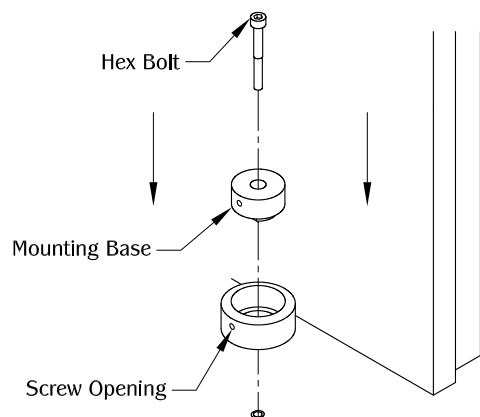

Align base and rubber stop to plastic anchor. Make sure set screw opening is lined up on both pieces. Secure the assembly with the hex bolt.

5

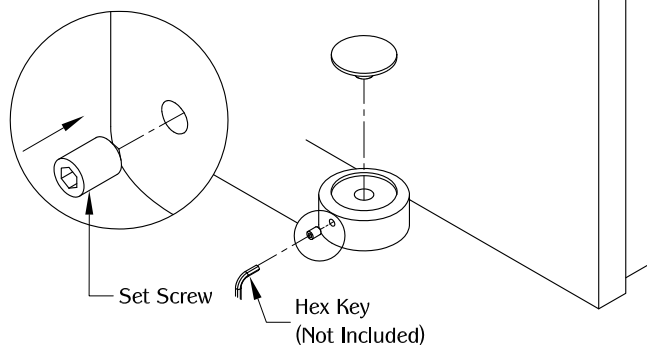

Install the cap on top of mounting base. Secure cap by using a hex key to tighten set screw.

TABLE OF CONTENTS:



..... 1X DS18



..... 1X 1-31/32"
M6-1.0 Thread
Hex Head Bolt



..... 1X Plastic Anchor



..... 1X 5/16"
6-32 Thread
Set Screw