

PCS75SQ/UC

PROPRIETARY AND CONFIDENTIAL.
ALL DIMENSIONS HAVE A +/- 1/16" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

⚠ WARNING ⚠

- For indoor use only.
- For use on normally dry work surfaces only.
- If any malfunction occurs, do not attempt to disassemble or repair.
- Allow enough clearance for part operation.
- Avoid placing the unit in a high temperature environment or near fire.

SPECIFICATIONS

- 6 ft. power cord length.
- Recommended table thickness should be 5/16" MIN. to 1-7/16" MAX.
- Recommended cutout is 1-3/4" DIA.
- USB-A and USB-C ports are for charging use only.
- Power adapter dimension is 2-13/16" X 1-11/16" X 1-7/16".

TABLE OF CONTENTS





..... 1X PCS75SQ/UC Core




..... 1X Housing



..... 1X Lock Ring

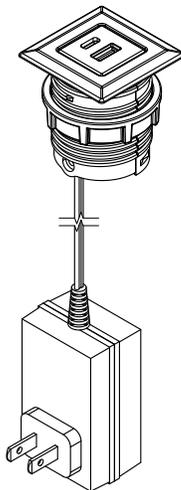


TOP VIEW

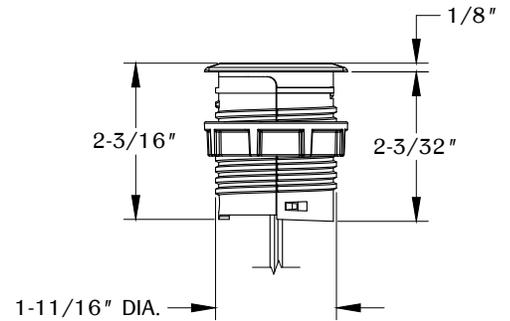


FRONT VIEW

1

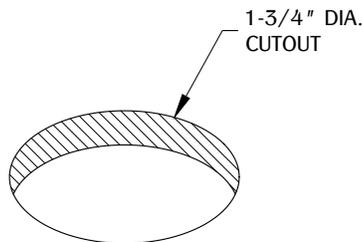

Determine the position and location of the unit on the work surface. Make a cutout in the desired location on your work surface. Allow enough clearance for unit operation. DO NOT place unit where cable is strained or trapped.

2

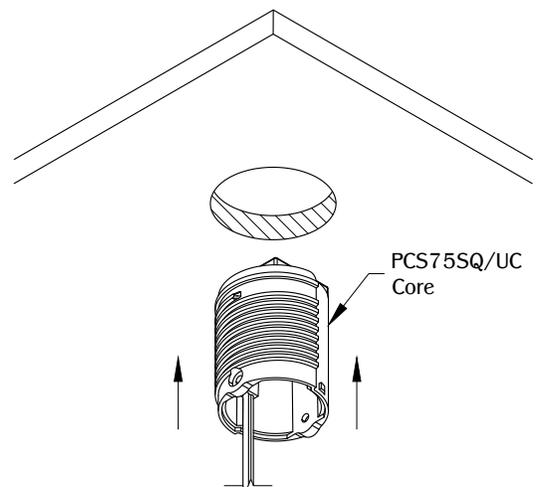


Guide the PCS75SQ/UC core through the bottom of the cutout.


PCS75SQ/UC

PROPRIETARY AND CONFIDENTIAL.


ALL DIMENSIONS HAVE A +/- 1/16" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

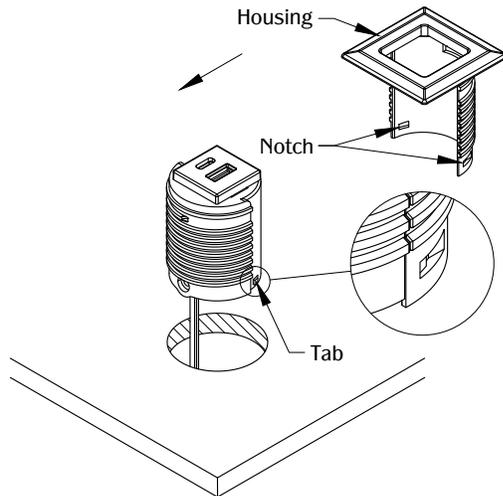3

Attach the housing to the PCS75SQ/UC core by snapping the notch over the tab.

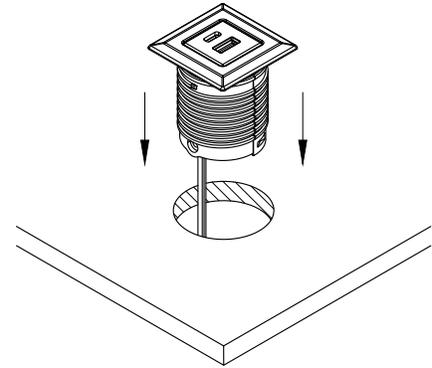4

Install the unit into the cutout. Make sure it is fully level onto the work surface.

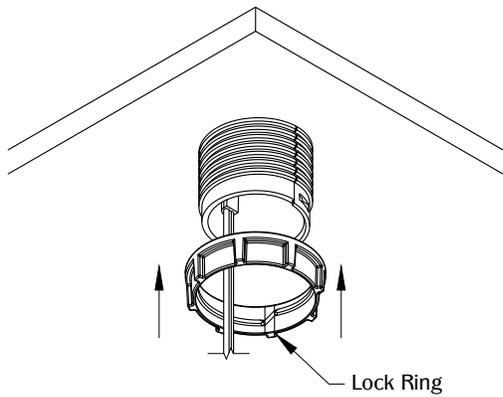5

Tighten the lock ring until the unit is secure. Plug into a nearby outlet and the unit is ready for use.