
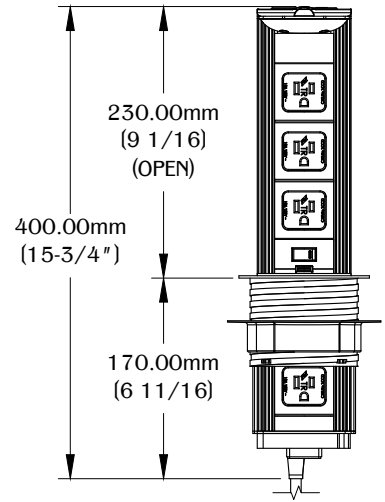



NOTE:

- 9 ft. cord length.
- USB ports are for charging use only.
- Table thickness is 1/2" MIN. to 2" MAX.
- Minimum clearance required under the work surface is 16".

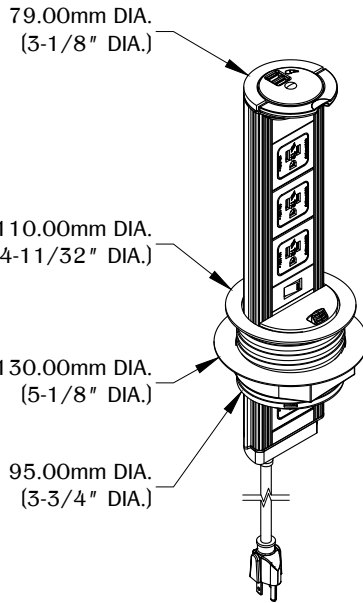


FRONT VIEW
(OPEN)

1

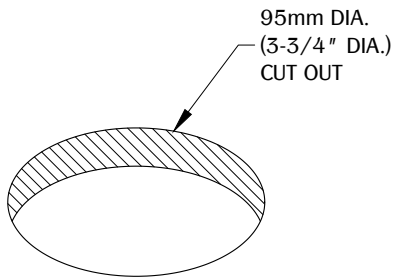

Make a cut out in the desired location on your work surface. Place near a power outlet and allow enough clearance for unit operation. **DO NOT** place unit where the cable is strained or trapped.

2

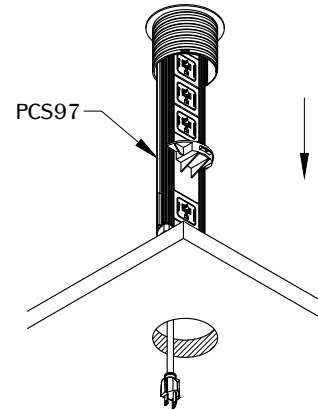

Remove the lock ring from the unit. Guide the power cord through the cut out and install the unit into the cut out and make sure it is fully leveled onto the surface.

! WARNING !

- For indoor use only.
- If any malfunction occurs, do not attempt to repair.
- Do not insert foreign objects into power outlets.
- For counter top mounting.
- Risk of electric shock. (Do not plug into another relocatable power tap.)
- Do not plug in equipment that exceeds the amperage rating of the unit.
- Do not attempt to close the unit with power cords still connected to the outlets.
- Never force the unit down or up - always check that there are no obstructions which would interfere with the operation of the unit before using or stowing the unit.


TABLE OF CONTENTS:



.....1X PCS97


.....1X Lock ring

3

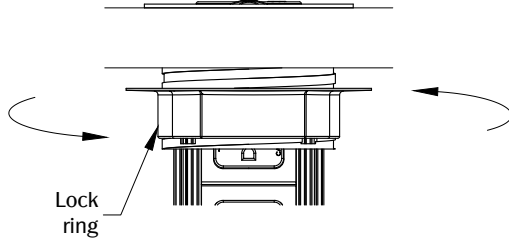

Guide the Lock ring through the power cord, and tighten onto the mounting collar by turning clockwise. Locking ring should rotate smoothly if properly engaged. If not, the locking ring may be cross-threaded - undo and try again.

4 Charging USB ports

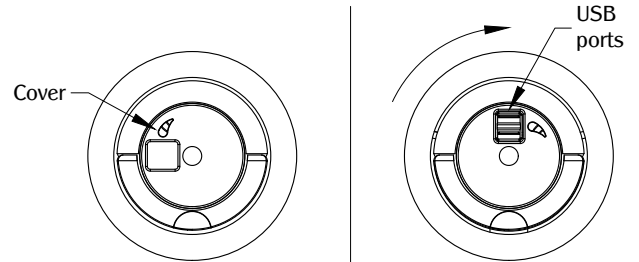


TOP VIEW: (Close)

TOP VIEW: (Open)

Charging USB ports are hidden. Slide the top cover clockwise to uncover the ports.

5 Convenience outlet



Please note 'Convenience outlet' not specified to connect another power distribution unit.