




NOTE:
PLEASE USE APPLICABLE DATA BEZEL. (SEE DATA INSTALLATION FOR MORE INFORMATION.)

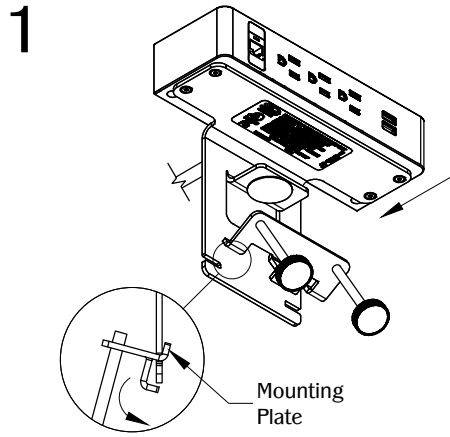

Loosen the thumb screw to install the mounting clamp in the notch at the lower part of the unit.

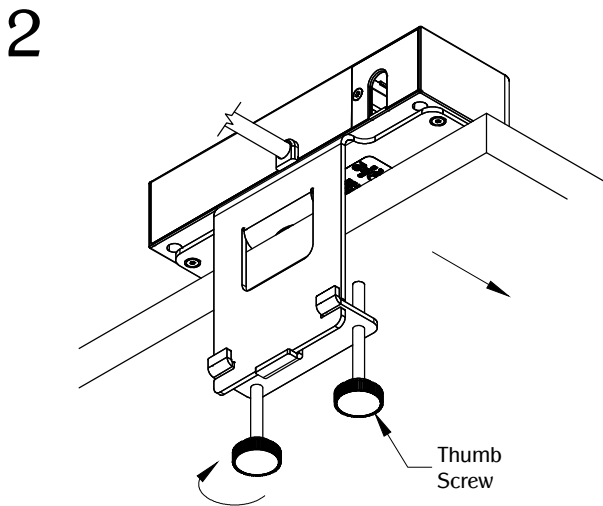


Install the unit at the desired edge of the work surface. Make sure the unit is fully leveled on the work surface. Secure the unit by tightening thumb screws.

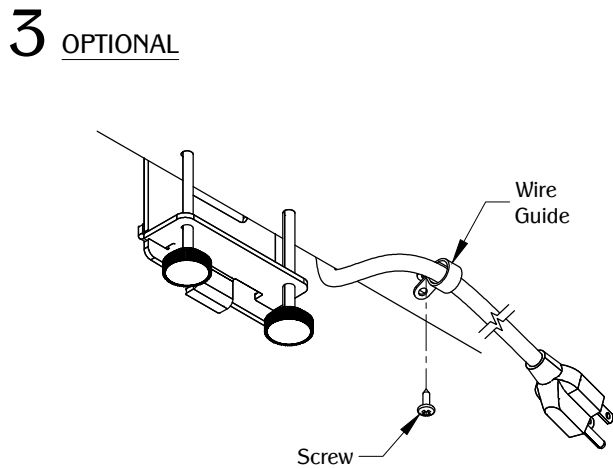


Use the optional wire guide to secure the power cord. Plug the unit into nearby outlet (outlet should be close enough to where power cord is not taut or strained) and unit is ready for use.

TABLE OF CONTENTS:



-1 X PCS98C
(3 POWER,
1 DATA, &
1 DUAL USB)
-1 X Mounting Clamp



.....2 X Thumb screws




.....2 X Wire Guides



.....2 X Screws


Data Installation

1

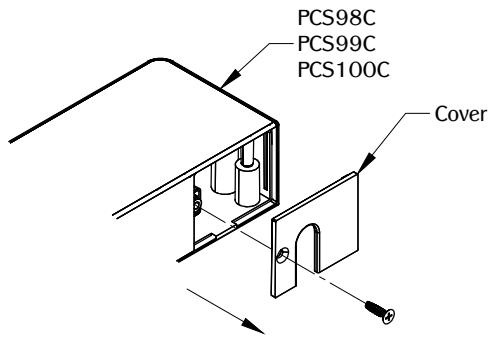


Remove the cover using a philips screwdriver.

2

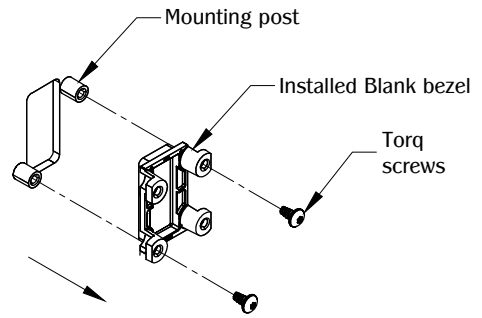

Use torq screwdriver to remove the blank bezel in the unit.

3



Bezel Type


AVAILABLE BEZEL TYPE:

- Keystone
- Panduit
- Simon
- Belden EZ
- CommScope
- Ortronics
- VGA (Front & Rear)
- Cable retainer
- Blank

REAR VIEW


Select the corresponding data type labeled on the bottom rear of the data bezel.

4

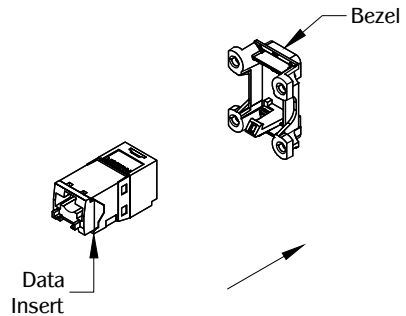


Wire the data insert and snap it to the bezel.

4 CONT.

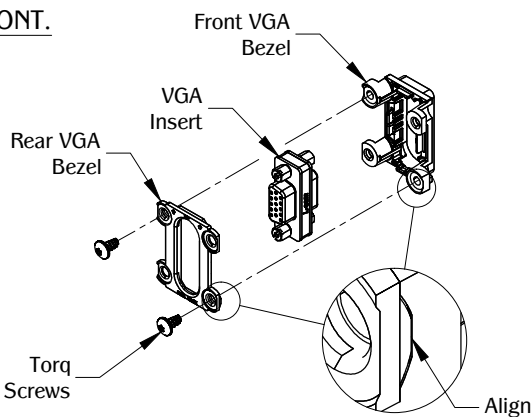

For VGA data, use the front and back VGA bezel. Make sure the front and back bezel align as shown above.

5

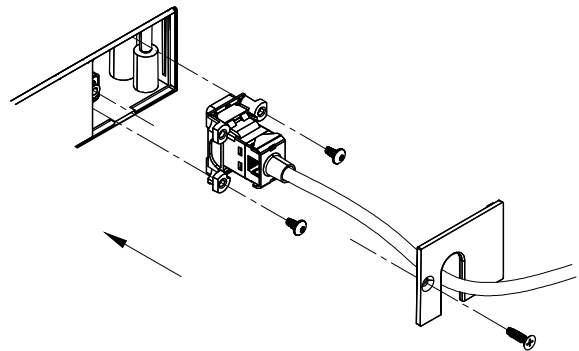

Install the data insert assembly upright in the unit and use (2) torq screws. Guide the wire from the cover opening. Secure the cover with the screw.

TABLE OF CONTENTS:



.....8 X Data Bezel



.....4 X Torq Screws