



1

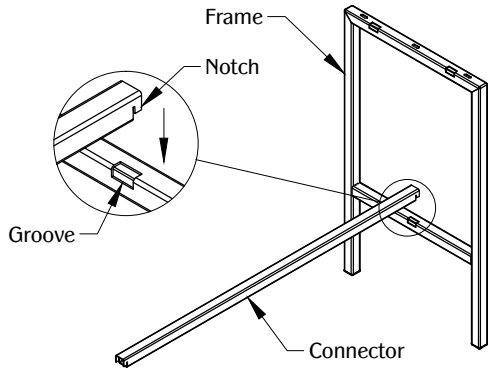


Assemble frame and connector. Find the groove on the lower support of the frame. Align the notch on the connector to the groove. Use a rubber mallet to secure the connector. Align the other frame from the other side and repeat steps.

2

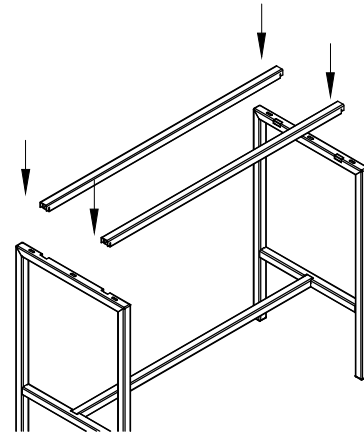


Install the top supports by using (2) connectors. Align the notch on the connector to the groove on top of the frame. Use a rubber mallet to secure the connector.

3

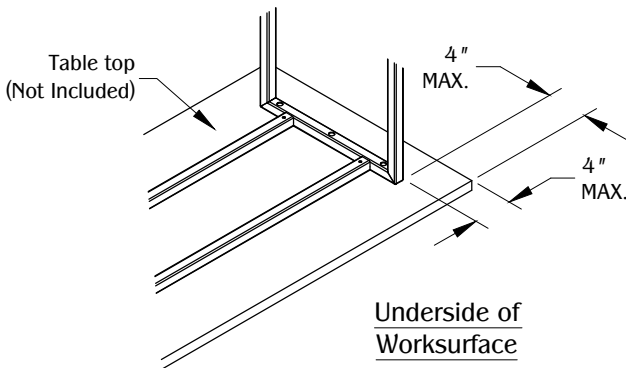

Mount the table leg assembly from the underside of the table top. (Note: Overhang allowance is 4" MAX. on all edges.)

4

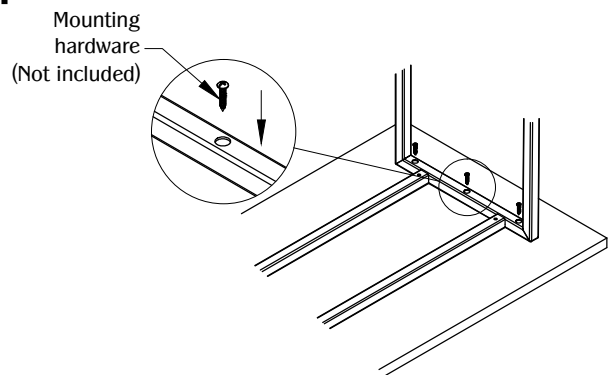




Use the appropriate mounting hardware for securing the table top to the table legs. (Note: Mounting hardware not included.)

! WARNING !

- Weight Capacity is 84 lbs Max.
- Do NOT exceed maximum load.
- Do NOT sit or stand on table.
- Remove all objects from the table before moving.
- Do NOT lean on the edge of the table to prevent it from tipping over.

TABLE OF CONTENTS:

3X Connectors
1X Left frame
1X Right frame