



PART #

PCS117

310.318.2491 • 800.523.1269 • www.mockett.com


NOTE:

- USB ports are for charging use only.
- Cord length is 10 ft.
- Table thickness is 1" MAX.
- See PAGE 2 for installation without bezel.

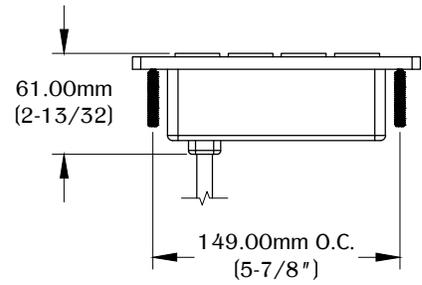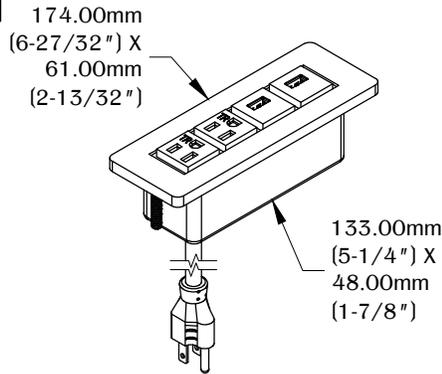


FRONT VIEW

### 1a Installation with Bezel

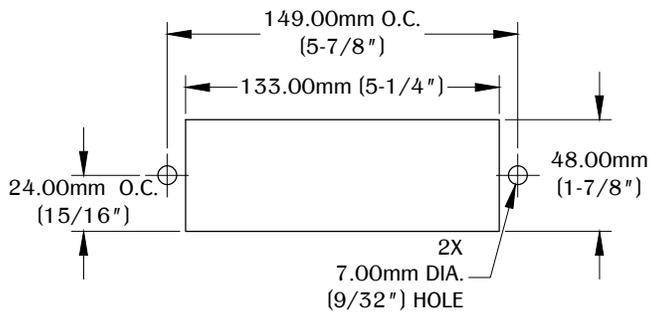


Determine the position and location of the unit on the work surface. Cut the hole at 5-1/4" X 1-7/8". Drill (2) 9/32" DIA. holes at 5-7/8" on center. DO NOT place unit where the cable is strained or trapped.

### 3a

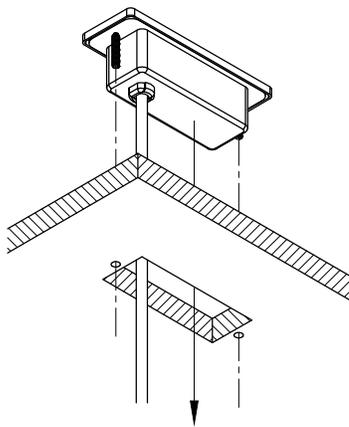


Guide the power cord through the cut out. Install the unit into the cut out and make sure it is fully leveled onto the surface.

### 2a

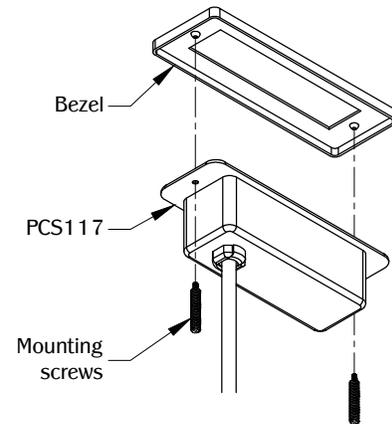


Align the bezel on top of the unit. Secure the bezel with the (2) mounting screws.

### 4a

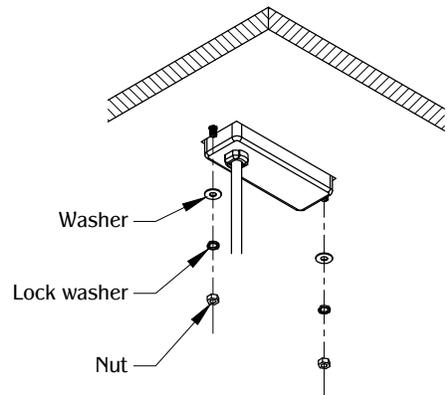

Align the (2) washer, (2) lock washer and (2) nut to the mounting screws under the unit and tighten to secure the unit. Plug the unit into nearby outlet and unit is ready for use.

TABLE OF CONTENTS:



.....1X PCS117

.....1X Bezel




.....2X Washer

.....2X 1-1/2" 1/4 -20 Thread Specialty Mounting screws

.....2X Lock washer


.....2X Nut

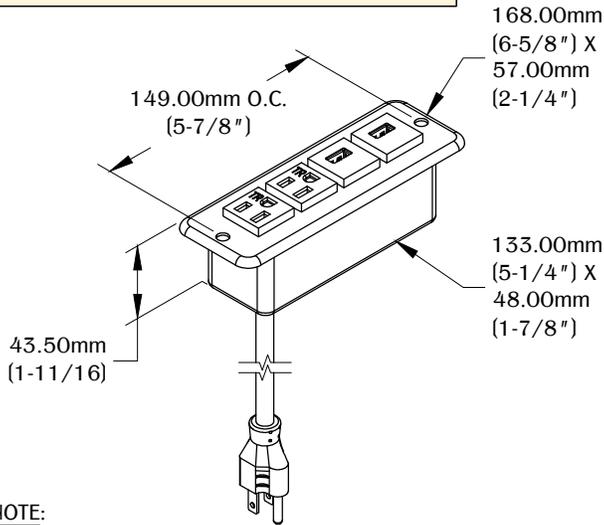

**NOTE:**


- USB ports are for charging use only.
- Cord length is 10 ft.

### 1b No Bezel Installation

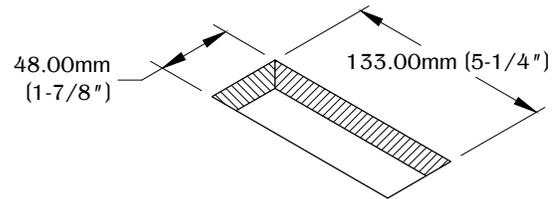


Determine the position and location of the unit on the work surface. Cut the hole at 5-1/4" X 1-7/8". Place and allow enough clearance for unit operation. **DO NOT** place unit where the cable is strained or trapped.

### 2b

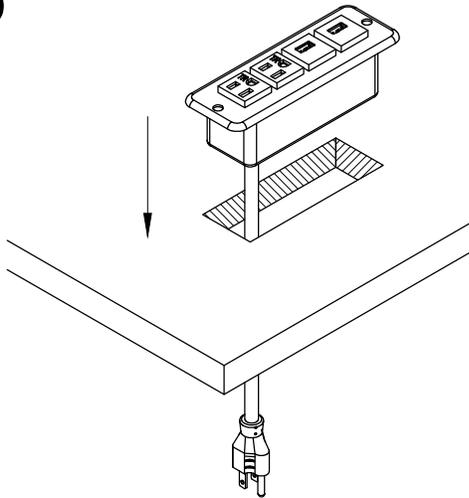

Guide the power cord through the cut out. Install the unit into the cut out and make sure it is fully leveled onto the surface.

### 3b

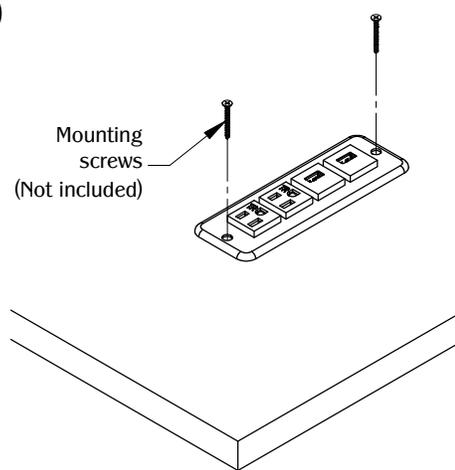

Secure the unit by using (2) mounting screws. Plug the unit into nearby outlet and unit is ready for use.