




1 Assemble frame and connector. Find the groove on the lower support of the frame. Align the notch on the connector to the groove. Use a rubber mallet to secure the connector. Align the other frame from the other side and repeat steps.

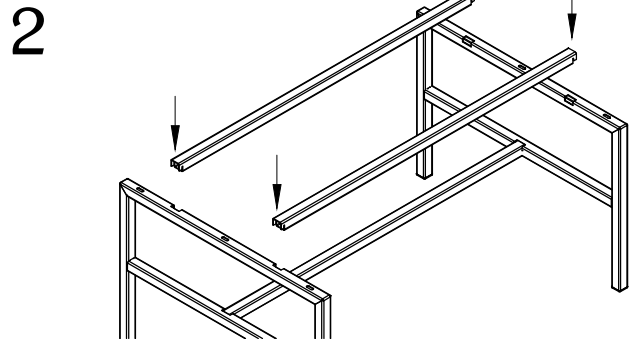

2 Install the top supports by using (2) connectors. Align the notch on the connector to the groove on top of the frame. Use a rubber mallet to secure the connector.

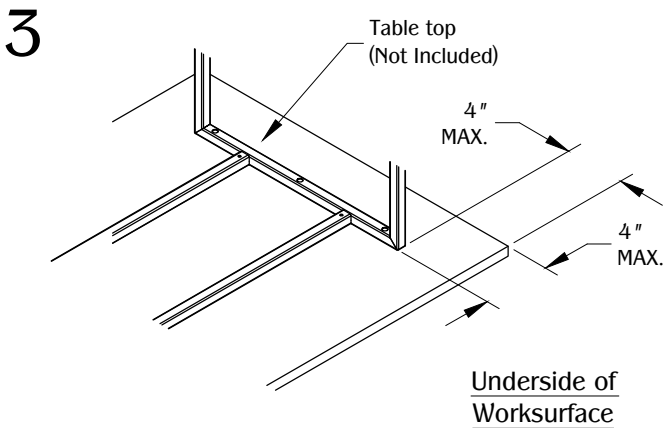

3 Mount the table leg assembly from the underside of the table top. (Note: Overhang allowance is 4" MAX. on all edges.)

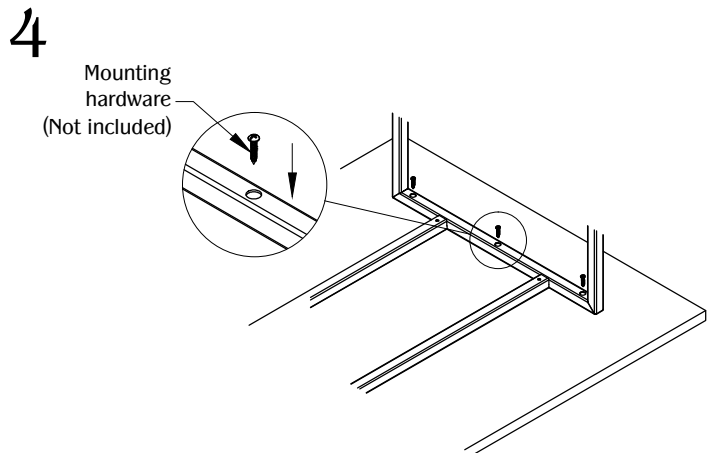




4 Use the appropriate mounting hardware for securing the table top to the table legs. (Note: Mounting hardware not included.)

**! WARNING !**

- Weight Capacity is 114 lbs Max.
- Do NOT exceed maximum load.
- Do NOT sit or stand on table.
- Remove all objects from the table before moving.
- Do NOT lean on the edge of the table to prevent it from tipping over.

TABLE OF CONTENTS:

	.....3X Connectors
	.....1X Left frame
	.....1X Right frame