



1

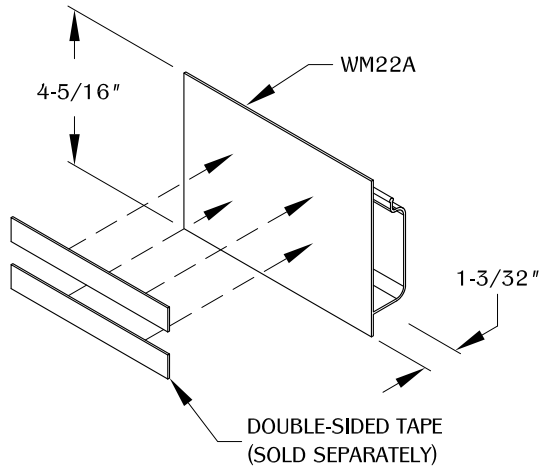


Apply adhesive or double-sided tape to the back of the WM22A. If purchased with double-sided tape pre-installed, proceed to step 2.

2

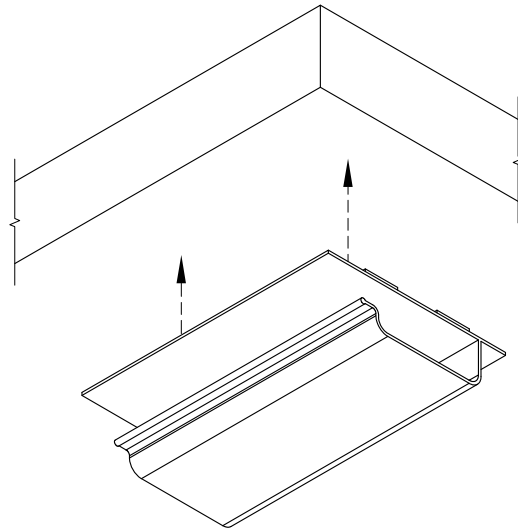


Determine the position and location underneath the work surface in which to apply the WM22A.

3

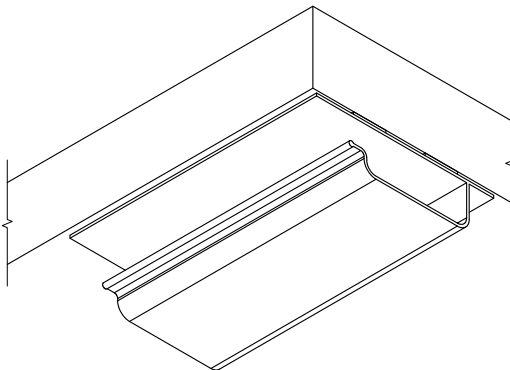


Apply pressure to the WM22A when placing against the work surface until it is held into position by the adhesive.

4

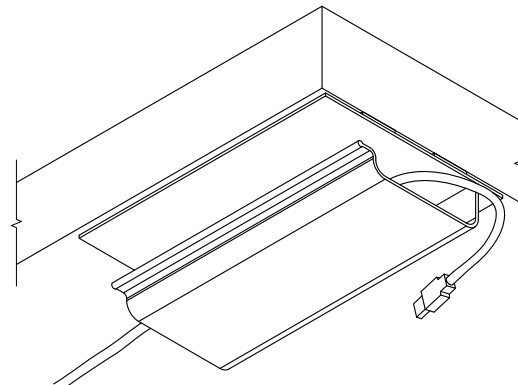

Place wires into position by slipping them through the small opening on top of the WM22A.

TABLE OF CONTENTS:



..... WM22A