

TLEL8



PROPRIETARY AND CONFIDENTIAL.
ALL DIMENSIONS HAVE A +/- 1/8" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

⚠ WARNING ⚠


- For indoor use only.
- Allow enough clearance for part operation.
- If any malfunction occurs, do not attempt to disassemble or repair.
- Avoid placing the leg or cables in direct sunlight, in a high temperature environment or near fire.
- Risk of electric shock - Do not plug into another relocatable power tap, an FPDU (Furniture Power Distribution Unit), or an extension cord.
- Ensure power supply and system components are properly mounted and protected from pedestrian traffic and do not present a tripping hazard.
- Only use the included power adapter with the leg.

SPECIFICATIONS

- 6 ft. power cord length.
- Weight capacity is 130 lbs.
- Recommended table thickness is 1" (19.00mm) MIN. to 1-1/2" MAX. (38.00mm).
- Recommended table top is 19-11/16" SQ. (500.00mm) MIN. to 35-7/16" SQ. (900.00mm) MAX.



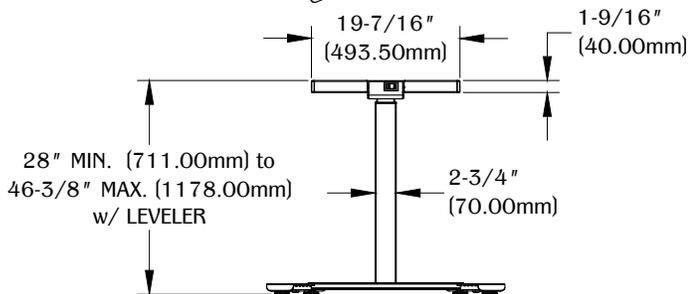
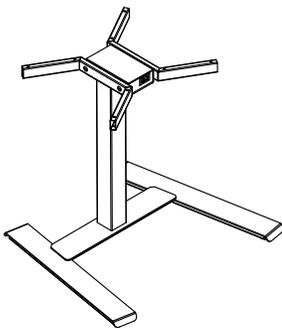


FRONT VIEW

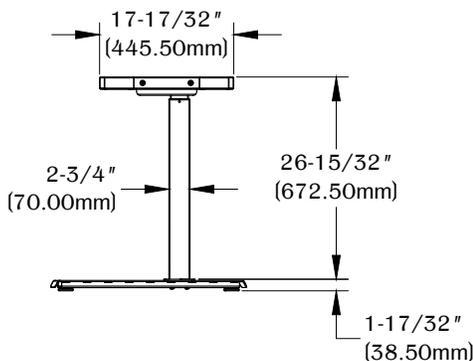

RIGHT VIEW


TABLE OF CONTENTS

 1X TLEL8 Leg
 2X Mounting Bracket
 1X Right Footing
 1X Left Footing
 1X Base Bracket
 1X Adapter Tray
 1X AC Adapter
 1X Power Cord
 1X Controller
 4X Leveler
 8X M5 X 55.00mm Flat-head Wood Screw
 14X M8 X 1.25 X 16.00mm Button Head Hex Screw
 2X M3.5 X 16.00mm Button Head Screw
 1X Hex Key


TLEL8

PROPRIETARY AND CONFIDENTIAL.


ALL DIMENSIONS HAVE A +/- 1/8" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

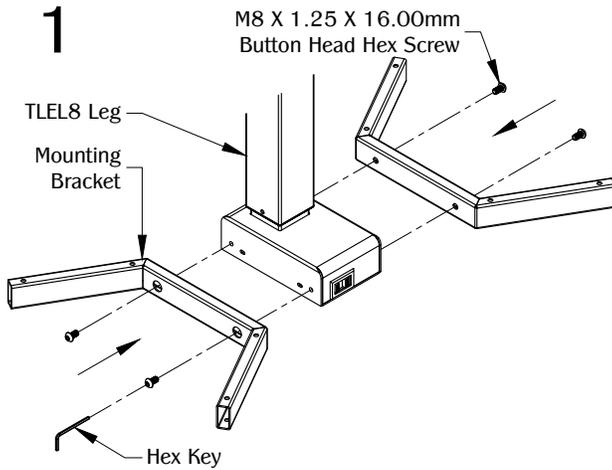


Orient the TLEL8 leg as shown above. Assemble the (2) mounting brackets to the TLEL8 leg with (4) M8 X 1.25 X 16.00mm button head hex screws using the hex key.

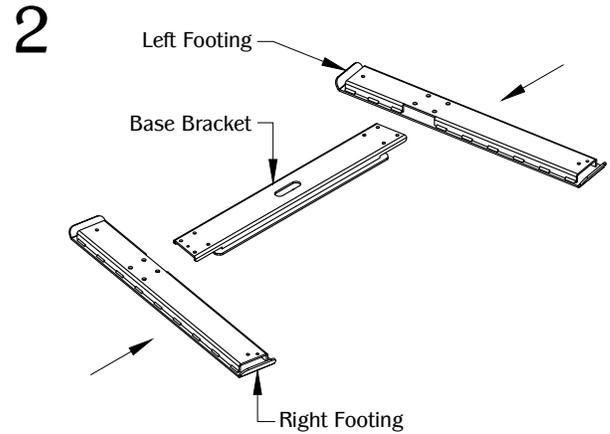


Orient the base bracket as shown above. Assemble the base bracket with the left and right footing. Insert the left and right footing opening to the base bracket and align the mounting holes.

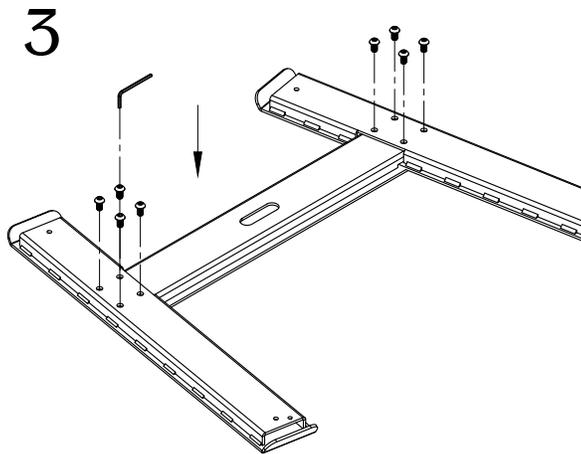


Secure the footings with (8) M8 X 1.25 X 16.00mm button head hex screws with the hex key.

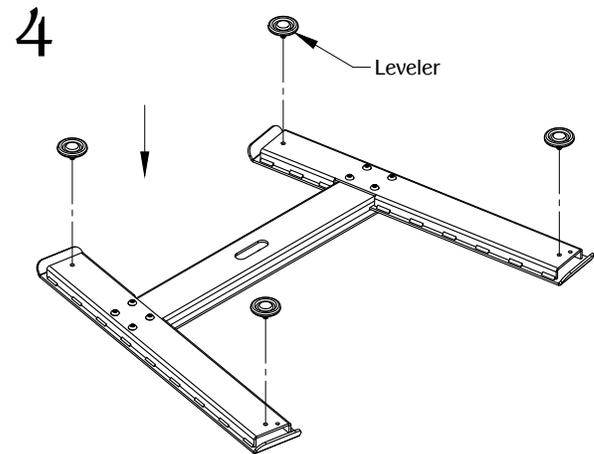

Install the (4) levelers to the footings.

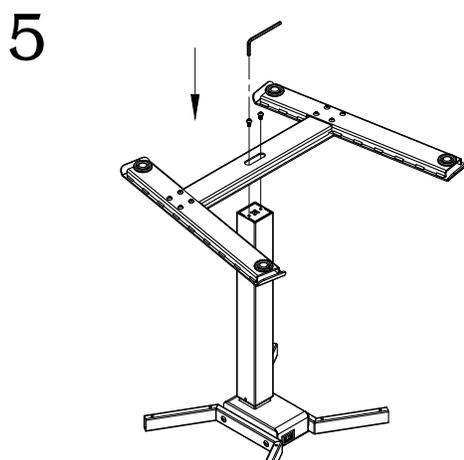

Secure the assembled base bracket to the bottom of the TLEL8 leg by using (2) M8 X 1.25 X 16.00mm button head hex screws with the hex key.

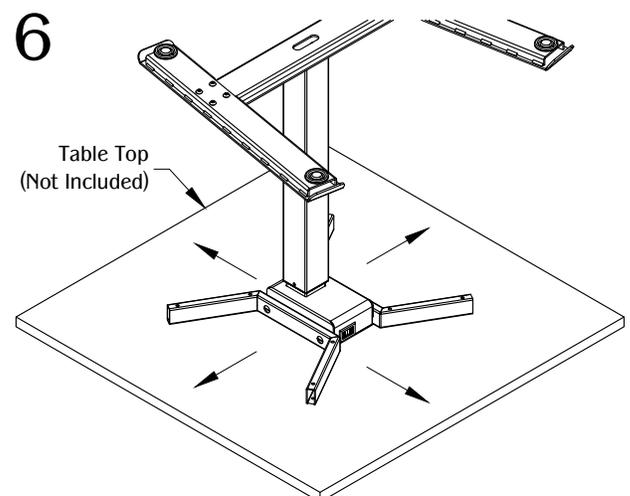


Place and center the assembled TLEL8 leg over the underside of the table top.

TLEL8

PROPRIETARY AND CONFIDENTIAL.


ALL DIMENSIONS HAVE A +/- 1/8" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

7

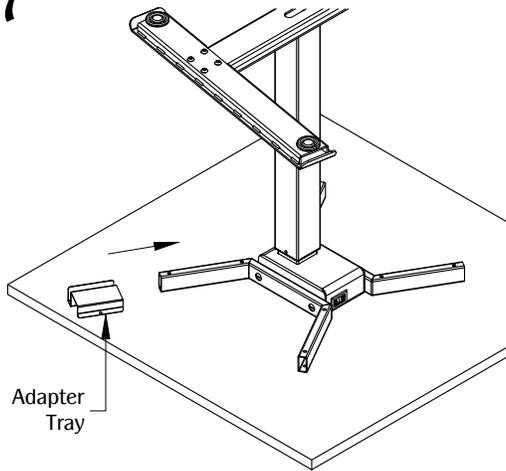


Install the adapter tray into the mounting bracket.

8

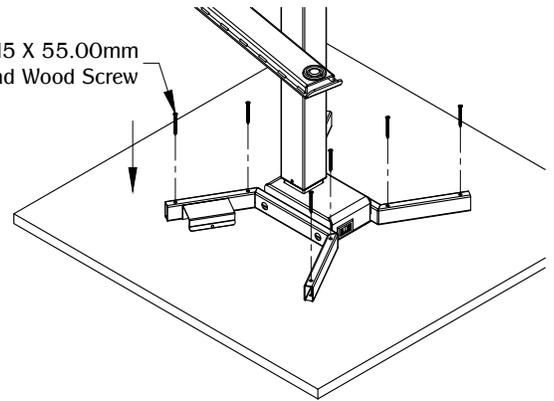M5 X 55.00mm
Flat-head Wood Screw


Secure the table top to the TLEL8 leg using (8) M5 X 55.00mm flat-head wood screw.

9

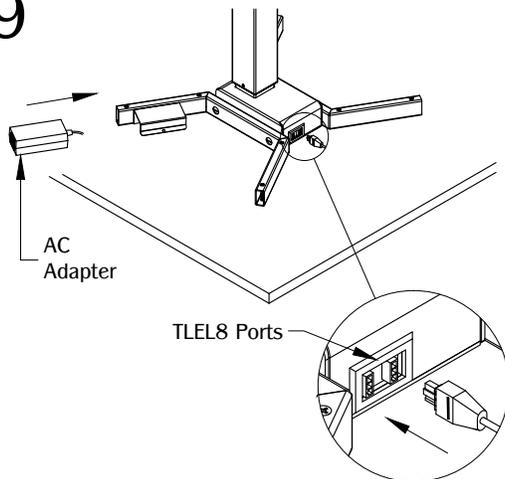


Install the AC adapter into the adapter tray. Plug in the AC adapter connector to the TLEL8 leg ports.

10

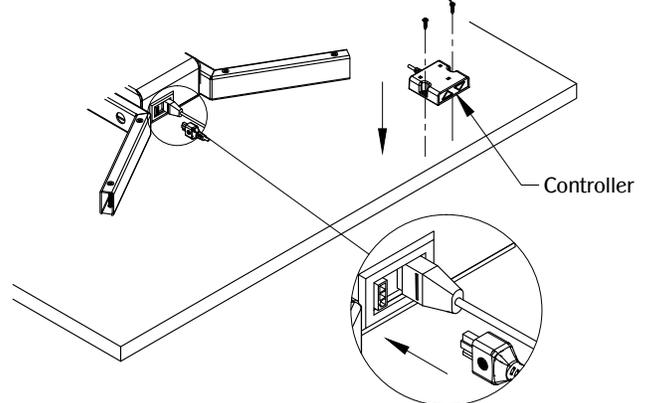M3.5 X 16.00mm
Button Head Screw


Install the controller onto the table top by using (2) M3.5 X 16.00mm button head screw. Plug in the controller connector to the TLEL8 port.

11

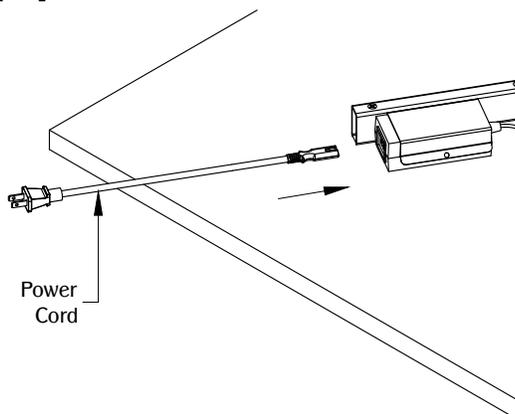

Insert the power cord connector to the AC adapter.

12

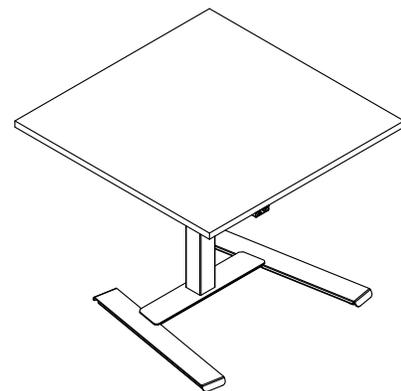

Stand the TLEL8 desk assembly and move to the desired location. Make sure cable is not strained or taut. Adjust leveler as needed. Plug into a nearby outlet and unit is ready for use.

TLEL8

PROPRIETARY AND CONFIDENTIAL.

ALL DIMENSIONS HAVE A +/- 1/8" TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

SAFETY INFORMATION

To reduce the risk of death, serious injury, or property damage, read and follow this safety information and provided instructions when assembling this product. Do not change or replace components and accessories provided by MOCKETT.

INSTALL ONLY APPROVED WORK SURFACES.

This table system does not include a work surface (desktop). Recommended work surface must be at least 3/4" thick minimum and weigh no more than 5 lbs. per square foot. (For example, a 2' x 2' desktop should weigh no more than 60 lbs.) We recommend your table top not exceed 75 lbs. To prevent table from tipping or collapsing, make sure the TLEL8 is not overloaded by the weight of table top and objects you plan to put on table.

KEEP AWAY FROM SMALL CHILDREN

This table system is not designed for use in homes or other areas accessible by small children. Recommended for indoor commercial office use only.

BE CAREFUL WHEN ADJUSTING DESK HEIGHT

Body parts and property can be caught between the moving work surface and an immobile obstacle (such as shelves, furniture, window sills, or walls). Keep at least one inch of clearance around desk and make sure nothing is in table's path for its entire range of motion.

BEFORE RAISING AND LOWERING

- Check surroundings on all sides of desk are clear.
- Make sure corded objects will not be pulled off table or cause other objects to fall.
- Make sure desk power cord moves freely as desk moves up and down.

DO NOT OVERLOAD DESK

To prevent table from tipping or collapsing, make sure the TLEL8 is not overloaded by the weight of table top and objects on the table. Evenly distribute load; excess loads near edges can reduce stability and lead to tip over.

- Do not exceed maximum load (including maximum weight of desktop) of 130 lbs.
- Do not sit or stand on table.

USE CARE WHEN MOVING DESK

- Clear objects and equipment from table before moving to reduce the risk of tipping over.
- Adjust the desk to its lowest height before moving.
- To disconnect, turn all controls to the off position, then remove plug from outlet.
- Do not move a loaded desk.
- Do not lift the desk by the work surface (desktop).


DO NOT OPEN ELECTRICAL COMPONENTS

Please contact MOCKETT. Do not attempt to service table components. There are no user-serviceable parts inside the motor control units or table legs.

KEEP TABLE FRAME DRY

Keep all electrical components away from water and high humidity. Clean the desk stand by wiping it down with a dry microfiber cloth. Do not use solvent, abrasive or corrosive compounds.

OPERATING TLEL8 CONTROLLER

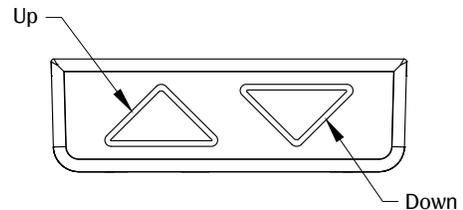

UP AND DOWN OPERATION

Press and hold the "Up" button the table will move up. Press and hold the "Down" button the table will move down. When doing short press' on the "Up" or "Down" button, the desktop runs a small distance.

RESTORE FACTORY SETTINGS

Press and hold the "Up" + "Down" button for 10 seconds. Then press and hold the "Down" button and the desk will slowly move to the lowest point possible. Then the desk/stand is ready for normal use.